

Composition® Peel'n'Stick Tiles feature a pressure-sensitive adhesive backing. Once applied, tiles cannot be repositioned and if removed may cause damage to paint/plasterboard or other surfaces. Peel'n'Stick Tiles should not be applied to concrete block or brick walls unless fully rendered - for this application we recommend the use of standard tiles in conjunction with a contact type adhesive. Where concrete block or brick walls have been fully rendered, Peel'n'Stick Tiles can be installed following these instructions.

PLEASE READ ALL INSTRUCTIONS BEFORE BEGINNING INSTALLATION

These guidelines are given to help prevent installation problems caused by the most common errors. Autex accepts no responsibility for installation actions taken or not taken.

These installation guidelines are strictly recommendations and are not intended to be a step-by-step, fool-proof installation checklist. If you have any questions about installation techniques for your particular project, please contact your distributor.

Tools Required

Snap-off knife and blades, straight edge, handroller or domestic rolling pin, cutting board or flat cutting surface.

Storage

Tiles must be laid flat and stored indoors on a solid and dry surface. Do not stack on a concrete floor or any other surface that emits moisture. Optimum storage conditions are 18°C with 45% - 55% relative humidity.

Inspection

Inspect tiles for any defects immediately. Do not install tiles of unacceptable quality. Autex will not be responsible for installation or removal costs of unacceptable tiles. Where more than one box of tiles is required, ensure they are the same batch as indicated on the product label on each box. Batch numbers should be recorded for future reference.

Before Installing/Pre-Conditioning

Prior to installing Peel'n'Stick Tiles, remove the packaging and allow the tiles to acclimatise to room temperature and humidity for approximately 1-2 hours. Ideally, both the room temperature and humidity during acclimatisation and installation should be the same as the final operating conditions.

Installation Conditions

Peel'n'Stick Tiles should only be installed on prepared surfaces. Minimum installation temperature is 18°C and maximum relative humidity 75%.

Uneven Surfaces

Installation over uneven surfaces will result in less than complete adhesion to the wall substrate, creating the potential for air pockets to form behind the tile. High and low spots should be levelled to provide an even wall surface.

SURFACE PREPARATION

General

Prior to installation ensure all surfaces are flat, dry, sound and free from dust or other contaminants. All surfaces should be washed with a detergent that will not leave a residue and should be allowed to fully dry. In particular, older painted surfaces or wallpaper may have a film, grease or other contamination that may need to be cleaned off.

We recommend surfaces are to be sealed.

Gloss surfaces which are not porous such as high gloss paint and some wallpapers, should be lightly scuffed first.

For more advice on specific applications please contact your local distributor.

We recommend that one tile be installed first to ascertain the suitability of the surface and preparation.


Concrete/Rendered Concrete Block

High and low spots should be levelled to provide an even wall surface. Concrete block walls must be fully rendered. New concrete walls must have had sufficient time to cure - generally 28 days. Walls must be free of hydrostatic pressure, moisture and excessive alkalinity. Efflorescence (white powder) on the surface must be removed. In any of these instances a suitable sealer/primer must be first applied and allowed to dry. All dust must be removed by wiping down with a wet cloth and allowed to thoroughly dry. Concrete walls may be subject to condensation or low surface temperatures and must be dried/warmed prior to installation.

INSTALLATION

Do not remove the release film on the tile until immediately prior to installation. Once the film has been removed the tile must not be exposed to any moisture or dust.

Peel'n'Stick Tiles have a pile direction indicated by the arrows on the back of the tiles. They must be laid with all the arrows in the same direction for uniformity or, as per the diagram, in a checkerboard style.

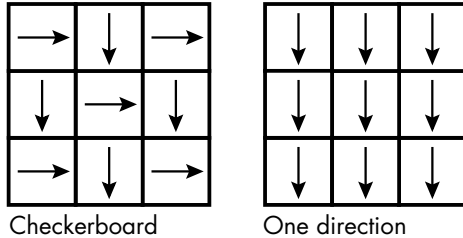

We recommend installing the tiles with the arrows pointing down. Where different colours are used together, all tiles should be laid in the same direction.

Changing the tile direction will create the appearance of slight colour variation.

Carefully plan out your installation and ensure you have the required number of tiles for the job.

Measure and mark out on the wall the area to be covered with Peel'n'Stick Tiles. Use a spirit level to ensure your lines are horizontally and vertically straight (it's a good idea to lay the tiles out on the floor to check the pattern first).

Check the distance from the marked centre to the adjacent walls to ensure that you will have a reasonable size cut at either end. If necessary, adjust the marked centre accordingly.

Start the first tile at the junction. Remove the release film and hold the tile at an angle to the wall; apply one edge to the line and then place the tile onto the wall (Fig. 1). Apply firm pressure from the centre of the tile out to the edges to ensure good adhesion. A roller must be used to firmly push the whole surface of the tile to the wall.




Fig. 1

Stick down the first row of tiles working to one side of the room.

Subsequent tiles should be laid up against the previous tile, holding the tile at an angle to the wall and then placing down.

To cut tiles in along adjacent walls, place the tile to be cut under the next tile nearest the wall and use that tile as your guide. Peel'n'Stick Tiles can be cut with a snap-blade knife and straight edge.

Re-roll all tiles when the job is complete to ensure good adhesion.

Please note: batches are sequentially numbered - the beginning of the number being the batch and the end digits being pack sequence.

For more information contact Autex Industries or visit our website www.autex.co.nz.

Product Specifications

Product Name	Composition® Peel'n'Stick Tiles
Tile Size	600m x 600mm
Thickness	10-12mm
Weight	Typically 1600gsm
Tiles per pack	6
Coverage	2.16m
Finish	Available in fine velour
Hook-and-Loop	Hook size 1.5mm or less
Acoustic rating	NRC 0.40

Colour Options

