


FIGHTER™

by Gabriel



66081

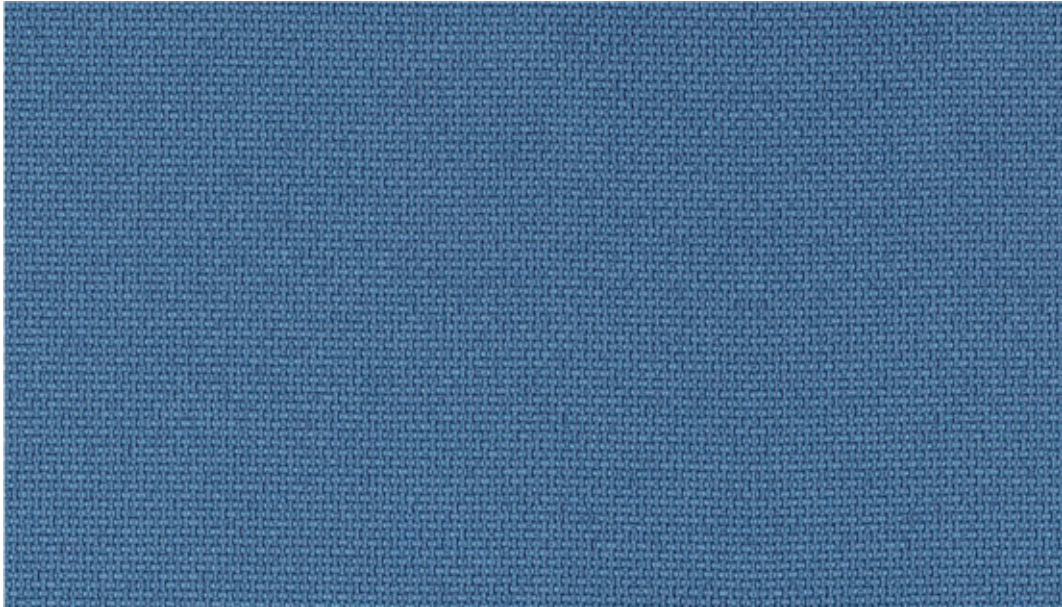


60082




61095



63044

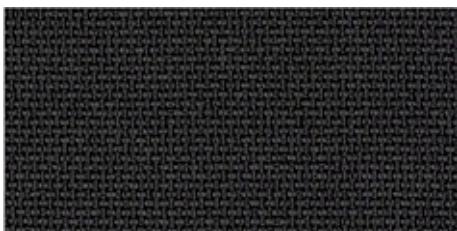

60083

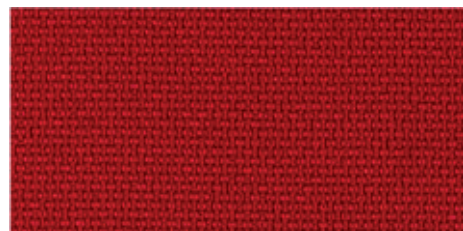

64103




60999




64102


Please be aware that the PDF colour shades can appear different from the real fabric colours.

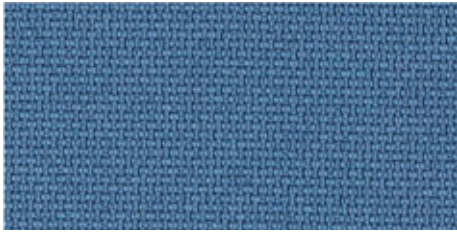

66081

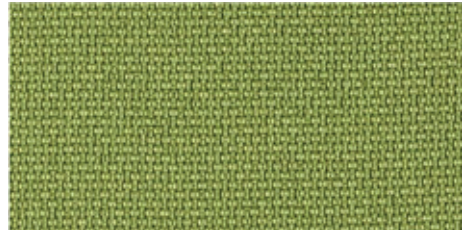

68069

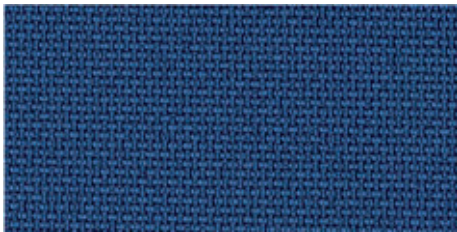

66082




68070



66083

Please be aware that the PDF colour shades can appear different from the real fabric colours.

FIGHTER™

Design no.	8610	
Fields of application	contract furnishing	
Material	polyester	100%
Weight	lin. metre · lin. yard approx. grams	510 · 466
Width	cm · yard	140 · 1,53
Abrasion resistance	rubs · EN ISO 12947-2 (Martindale)	130.000
Pilling	scale 1-5, max. 5 · EN ISO 12945-2	4-5
Colour fastness to light	scale 1-8, max. 8 · EN ISO 105 - B02	5-7
Colour fastness to rubbing	scale 1-5, max. 5 · EN ISO 105x12 (wet/dry)	4-5
ACT	AATCC 8-2001 Wet and Dry Crocking · California Bulletin CAL 117-E-Class 1 ASTM D4157-02 Wyz Abrasion · ASTM D3511 Pilling	
Cleaning	dry cleaning (P)  Shrinkage: max 2%	P-cleaning
Flammability	EN 1021 1&2 · Calif. Tech. Bull. 117, sec. E · Önorm B 3825 B1 - 3800-Q1 UK · BS 5852 Part 1 0,1 Cigarette & match · AM 18 - NF D 60-013 · UNI 9175 Class 1 I EMME. Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used and fireproof treatment.	
Design/Colours	Inger Mosholt Nielsen	

Subject to changes and colour differences



QUALITY SYSTEM AND ENVIRONMENTAL MANAGEMENT SYSTEM
DS/EN ISO 9001
DS/EN ISO 14001

